



Ciba® TINUVIN® 329


Benzotriazole UV Absorber

Characterization TINUVIN 329 is an ultraviolet light absorber (UVA) of the hydroxyphenylbenzotriazole class, which is used as a light stabilizer for plastics and other organic substrates.

Chemical Name 2-(2H-benzotriazol-2-yl)-4-(1,1,3,3-tetraethylbutyl)phenol

CAS Number 3147-75-9

Structure TINUVIN 329

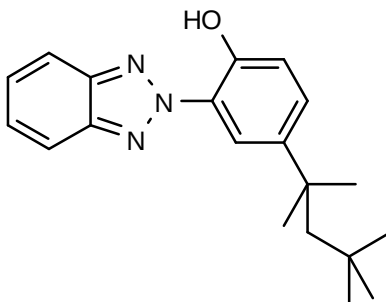

Molecular weight 323 g/mol

Applications TINUVIN 329 is an effective light stabilizer for a variety of plastics and other organic substrates.

Features/ Benefits TINUVIN 329 protects polymers from UV radiation, helping to preserve the original appearance and physical integrity of molded articles, films, sheets, and fibers during outdoor weathering.

Product Forms	Code:	Appearance:
	TINUVIN 329	slightly yellow powder
	TINUVIN 329 FL	slightly yellow, rod like granules

Guidelines for use The use levels of TINUVIN 329 range between 0.10 and 1.0%, depending on substrate and performance requirements of the final application. The product can be used alone or in combination with other additives such as light stabilizers (hindered amines), antioxidants (hindered phenols, phosphites, thiosynergists, hydroxybenzophenones, ketones), and other functional stabilizers and additives. The use of TINUVIN 329 in combination with hindered amine light stabilizers is particularly noteworthy in that a synergistic performance is often observed. Performance data of TINUVIN 329 alone or in combination with other additives are available in selected substrates.

Physical Properties


Melting Range 103-105°C

Flashpoint	> 150 °C
Specific Gravity (20 °C)	1.18 g / cm ³
Vapor Pressure (25°C)	1 E-5 Pa
Solubility (20 °C)	% w /w
Water	< 0.01
Acetone	9
Benzene	32
Chloroform	37
Cyclohexane	15
Ethyl acetate	15
n-Hexane	6
Methanol	0.6
Methylene chloride	38

Volatility (pure substance; TGA, heating rate 20 °C/min in air)

Weight loss (%)	Temperature (°C)
1.0	180
2.0	200
5.0	220

Absorption Spectrum (10 mg / l, Chloroform)

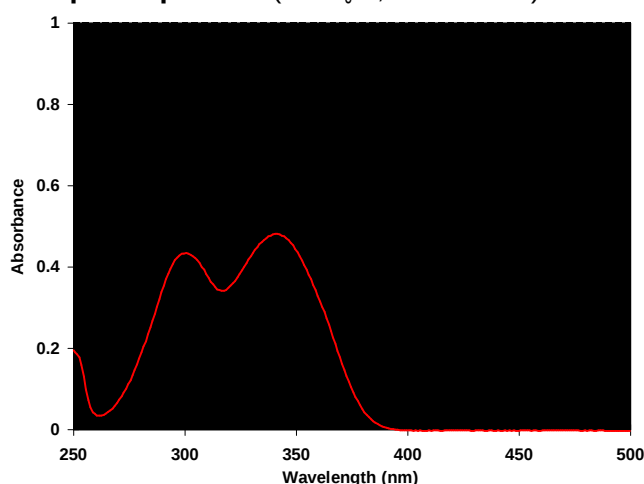

TINUVIN 329 exhibits strong absorbance in the 300-400 nm region and minimal absorbance in the visible region (> 400 nm) of the spectrum. The absorption maxima are at 301 nm and 343 nm ($\epsilon = 15910 \text{ l} \cdot \text{mol}^{-1} \cdot \text{cm}^{-1}$) in chloroform solution.

Handling & Safety In accordance with good industrial practice, handle with care and prevent contamination of the environment. Avoid dust formation and ignition sources.
For more detailed information please refer to the material safety data sheet.

Registration TINUVIN 329 is listed on the following Inventories:

Australia: ACS	Canada: DSL	Europe: EINECS
Japan: MITI	Korea: ECL	Philippines: PCCS
USA: TSCA		

TINUVIN 329 is approved in many countries for use in food contact applications.
For detailed information refer to our Positive List or contact your local sales office.

IMPORTANT: The following supercedes Buyer's documents. **SELLER MAKES NO REPRESENTATION OR WARRANTY, EXPRESS OR IMPLIED, INCLUDING OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** No statements herein are to be construed as inducements to infringe any relevant patent. Under no circumstances shall Seller be liable for incidental, consequential or indirect damages for a alleged negligence, breach of warranty, strict liability, tort or contract arising in connection with the product(s). Buyer's sole remedy and Seller's sole liability for any claims shall be Buyer's purchase price. Data and results are based on controlled or lab work and must be confirmed by Buyer by testing for its intended conditions of use. The product(s) has not been tested for, and is therefore not recommended for, uses for which prolonged contact with mucous membranes, a branded skin or blood is intended; or for uses for which ingestion with the human body is intended.